ELMIC

*Created at 10-11-2026*

# Mainline Black Terminal Block (Left)

**Price :**
**16.34 Euro**
Catalog No. : **MLITLB**
Manufacturer : **MAINLINE**
Availability : **On order**
Stock : **very high**
Rating : **no reviews**

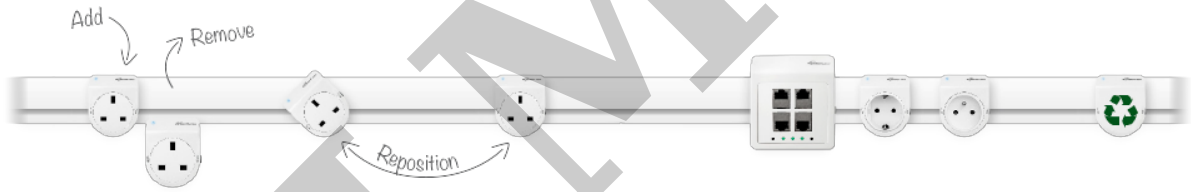


***Mainline Black Terminal Block (Left)***
***Mainline Power System***

ELMIC

**Video:**

The unique design means the position of the live strip (at the highest point in the track) restricts contact from foreign objects or prying fingers.

Mainline conforms to all relevant National Standrads in the Countries in which it is sold:

| Mainline System | |
|---|---|
| Single phase wall/surface mounted power track. | |
| Rated Voltage | Up to 250V a.c. |
| Rated Continuous Current | Up to 32 Amps a.c. |
| Product Environment for use | Indoor areas. |
| Degree of protection | IP2xD. |
| Dielectric Strength | 3 kV a.c. for 1 minute. |
| Flammability | Self Extinguishing UL 94- 5VA. |
| Track Material | High Impact Rigid PVC. |
| Adaptor contacts engaged within a system of stamped copper rails fitted into a thermoplastic track. | |
| Adaptors can be connected and disconnected when system is energised. | |

ELMIC

| Product Conforms to National Standards | |
|---|---|
| Single phase power track: | 32A, 250V a.c. |
| BS EN 61534-1 I.S. EN 61534-1 | BS1363-2:1995+A1,A2 |
| BS EN 61534-21 I.S. EN 61534-21 | BS1363-2:1995+A1,A2 |
| BS EN 60999-1 I.S. EN 60999-1 | BS5733:1995+A1,A2 |
| MLA2 British socket outlet/adaptor: | 13A, 250V a.c. |

**Sample applications:**

ELMIC

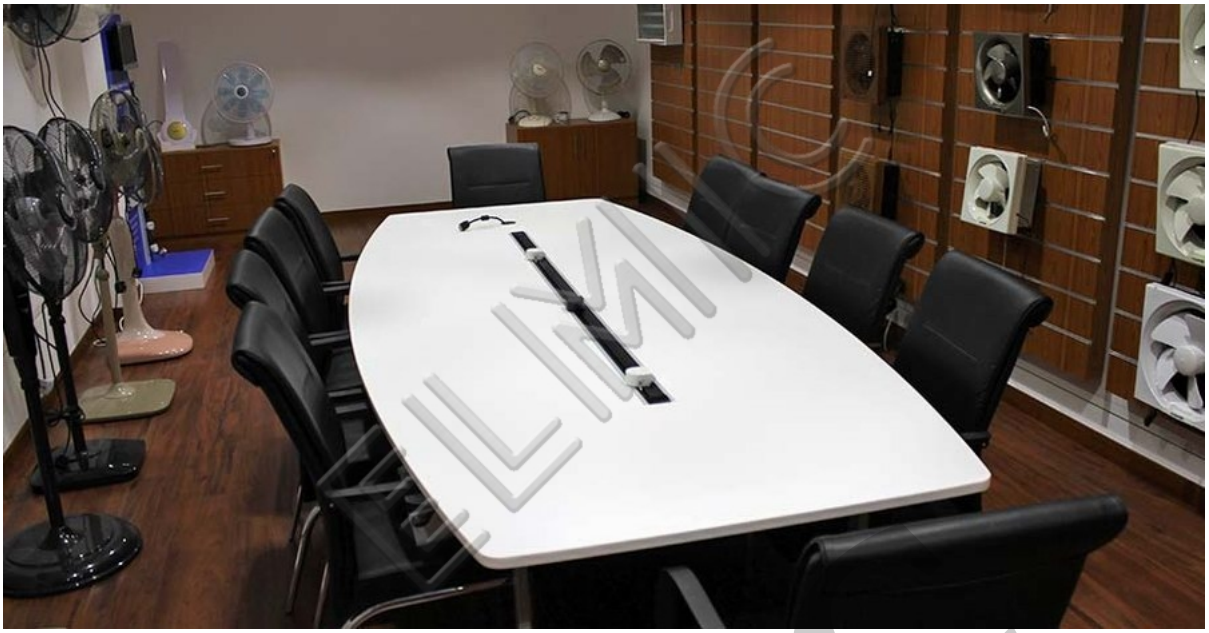

ELMIC