Created at 10-11-2026

Mainline Black Straight Connector

Price :
5.17 Euro
Catalog No. : **MLQCSJB**
Manufacturer : **MAINLINE**
Availability : **On order**
Stock : **very high**
Rating : **no reviews**

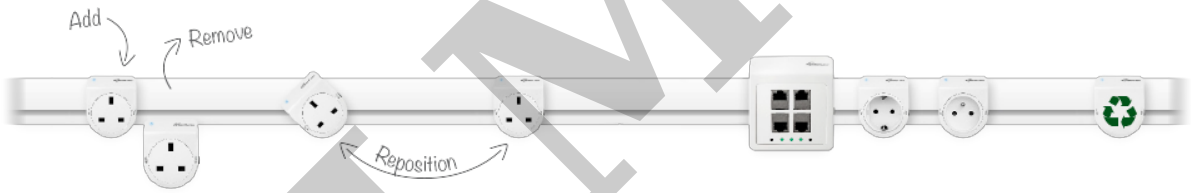

Mainline Black Straight Connector
Mainline Power System

Video:

The unique design means the position of the live strip (at the highest point in the track) restricts contact from foreign objects or prying fingers.

Mainline conforms to all relevant National Standrads in the Countries in which it is sold:

Mainline System	
Single phase wall/surface mounted power track.	
Rated Voltage	Up to 250V a.c.
Rated Continuous Current	Up to 32 Amps a.c.
Product Environment for use	Indoor areas.
Degree of protection	IP2xD.
Dielectric Strength	3 kV a.c. for 1 minute.
Flammability	Self Extinguishing UL 94- 5VA.
Track Material	High Impact Rigid PVC.
Adaptor contacts engaged within a system of stamped copper rails fitted into a thermoplastic track.	
Adaptors can be connected and disconnected when system is energised.	

Product Conforms to National Standards	
Single phase power track:	32A, 250V a.c.
BS EN 61534-1 I.S. EN 61534-1	BS1363-2:1995+A1,A2
BS EN 61534-21 I.S. EN 61534-21	BS1363-2:1995+A1,A2
BS EN 60999-1 I.S. EN 60999-1	BS5733:1995+A1,A2
MLA2 British socket outlet/adaptor:	13A, 250V a.c.

ELMIC
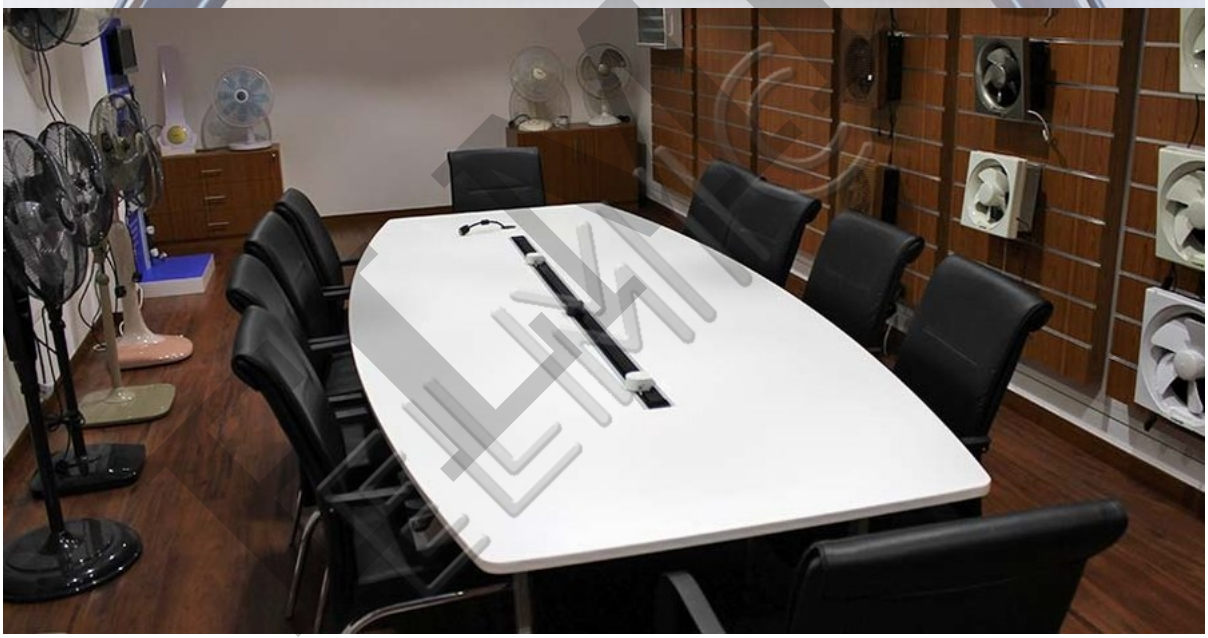
Sample applications: